

RENTAL SERIES LED DISPLAY

500mm * 500mm
500mm * 1000mm 

LRI-Y / LRO-Y Series



Features

- High precision die-casting design
- Both indoor and outdoor available
- Hub connection with modules and power supply
- Universal HUB for all indoor & outdoor pixel pitch
- Intelligent module option


Standard Dimension: 500mm * 500mm * 73mm

Optional Dimensions: 500mm * 1000mm

Cabinet Weight: 7.5KG (Standard Dimension)

Pixel Pitch: 1.9mm/2.5mm/2.6mm/2.9mm/3.9mm/4.8mm/5.9mm

APPLICATION

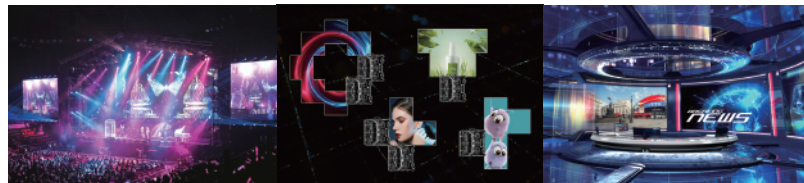

Vocal concert

Profiled screen

Telestudio

Indoor Specification:	P1.9	P2.5	P2.6	P2.9	P3.9	P4.8
Pixel Pitch	1.953mm	2.5mm	2.604mm	2.976mm	3.906mm	4.807mm
Pixel Density	262,144dots/m²	160,000dots/m²	147,456dots/m²	112,896dots/m²	65,536dots/m²	43,264dots/m²
LED Type	SMD1212	SMD1515	SMD1515	SMD2020	SMD2020	SMD2020
Module Resolution	128dots * 128dots	100dots * 100dots	96dots * 96dots	84dots * 84dots	64dots * 64dots	52dots * 52dots
Driving Mode	1/32scan	1/40scan	1/32scan	1/21scan	1/16scan	1/13scan
Module Size	250mm * 250mm	250mm * 250mm	250mm * 250mm	250mm * 250mm	250mm * 250mm	250mm * 250mm
Cabinet Size	500mm * 500mm or 500mm * 1,000mm					
Cabinet Resolution	256dots * 256dots	200dots * 200dots	192dots * 192dots	168dots * 168dots	128dots * 128dots	104dots * 104dots
Brightness	800nits	800nits	800nits	800nits	800nits	800nits
Refresh Rate	3,840HZ	3,840HZ	3,840HZ	3,840HZ	3,840HZ	3,840HZ
Gray Scale	14bits~22bits	14bits~22bits	14bits~22bits	14bits~22bits	14bits~22bits	14bits~22bits
Maximum Power Consumption	350W/m²	350W/m²	500W/m² or 350W/m²	500W/m²	500W/m²	500W/m²
Average Power Consumption	120W/m²	120W/m²	160W/m² or 120W/m²	160W/m²	160W/m²	160W/m²
Certificate	CE, FCC, ETL, CB	CE, FCC, ETL, CB	CE, FCC, ETL, CB	CE, FCC, ETL, CB	CE, FCC, ETL, CB	CE, FCC, ETL, CB
Outdoor Specification:	P2.6	P2.9	P3.9	P4.8	P5.9	
Pixel Pitch	2.605mm	2.976mm	3.906mm	4.807mm	5.952mm	
Pixel Density	147,456dots/m²	112,896dots/m²	65,536dots/m²	43,264dots/m²	28,224dots/m²	
LED Type	SMD1415	SMD1415	SMD1921	SMD1921	SMD2727	
Module Resolution	96dots * 96dots	84dots * 84dots	64dots * 64dots	52dots * 52dots	42dots * 42dots	
Driving Mode	1/24scan	1/21scan	1/16scan	1/10scan	1/7scan	
Module Size	250mm * 250mm	250mm * 250mm	250mm * 250mm	250mm * 250mm	250mm * 250mm	
Cabinet Size	500mm * 500mm or 500mm * 1,000mm					
Cabinet Resolution	192dots * 192dots	168dots * 168dots	128dots * 128dots	104dots * 104dots	84dots * 84dots	
Brightness	5,000nits	5,000nits	5,000nits	5,000nits	5,000nits	
Refresh Rate	3,840HZ	3,840HZ	3,840HZ	3,840HZ	3,840HZ	
Gray Scale	14bits~22bits	14bits~22bits	14bits~22bits	14bits~22bits	14bits~22bits	
Maximum Power Consumption	650W/m²	650W/m²	550W/m²	550W/m²	550W/m²	
Average Power Consumption	185W/m²	185W/m²	160W/m²	160W/m²	160W/m²	
Certificate	CE, FCC, ETL, CB	CE, FCC, ETL, CB	CE, FCC, ETL, CB	CE, FCC, ETL, CB	CE, FCC, ETL, CB	