


Hanging Display Series

P3.91/P6.25/P10.4

- Invisible Transparency, Unobstructed Design
- Ultra-Thin & Lightweight Structure
- True Glasses-Free 3D Visual Effects
- Flexible Customization for Various Applications
- Easy Installation, Building-Friendly Design
- Interactive Engagement for Maximum Foot Traffic

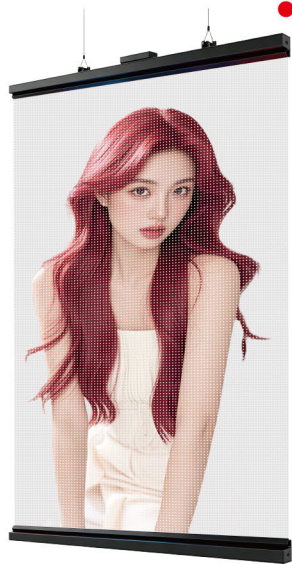

Item	P3.91	P6.25	P10.4
Pixel Pitch (mm)	3.91mm	6.25mm	10.4mm
Pixel Density (dots/m²)	65536	25600	9216
Visual Transparency	80%	90%	90%
Module Size (mm)	250×1000 / 1200 / 1500 / 2000		
Brightness (cd/m²)	≥4000		
Maximum Power Consumption	450W/m²		
Average Power Consumption	130W/m²		
LED Control System	Synchronous / Asynchronous		
Operating Temperature	-20~60℃		
IP Rating	IP45		
Input Voltage	AC110-240V 50/60 Hz		
Installation Environment	Indoor / Semi-Outdoor		
Packaging & Transportation	EPE Foam + Plywood Case / Flight Case		

Application Scenario

